

A



B

C


D

E

F

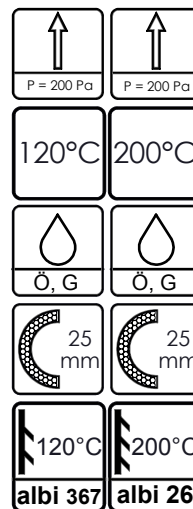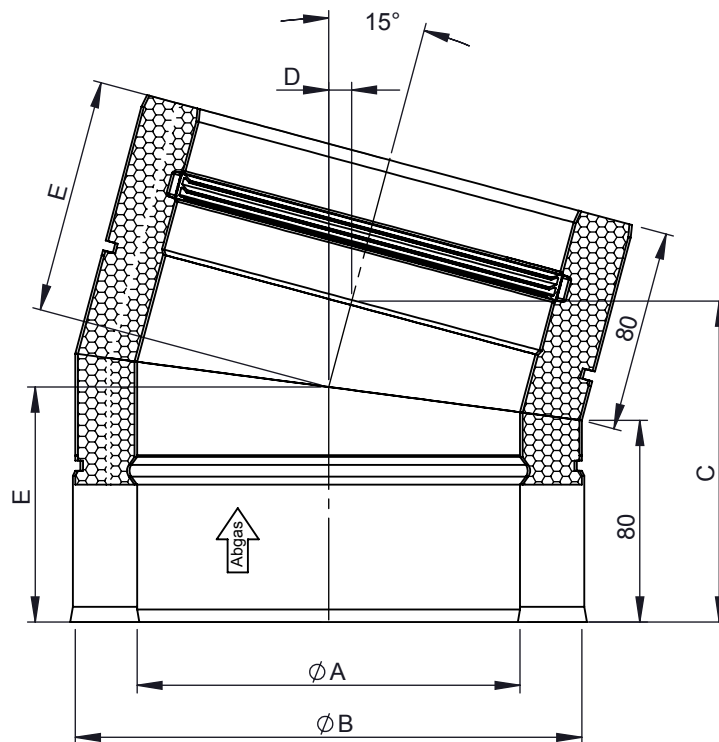

M 1:6 (Ø150)

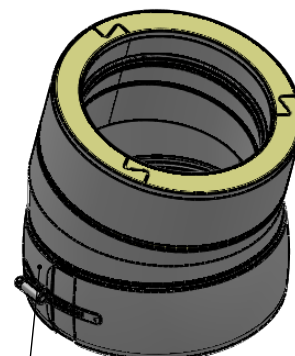

inkl. Systemklemmband

*Die innenliegenden Dichtringe müssen zusätzlich bestellt werden.
Im Standard erhalten Sie die Dichtung EPDM (albi367) bis 120°C.
Auf Wunsch können Sie die Ausstattung mit der Dichtung (albi26) bis 200°C erhalten.

Ø	80	100	130	150	160	180	200	225	250	300	350	400	450	500	600
A	80	100	130	150	160	180	200	225	250	300	350	400	450	500	600
B	130	150	180	200	210	230	250	275	300	350	400	450	500	550	650
C	118	121	125	127	129	131	134	137	140	147	153	160	166	173	185
D	8		9			10			11	12	13	13	14	15	17
E	89	90	92	93	94	95	97	98	100	103	106	110	113	116	123
kg	0,94	1,13	1,41	1,6	1,69	1,89	2,1	2,36	2,62	3,18	3,77	4,38	5,02	5,69	7,11

notes:

DIN ISO 13920 Tolerances B

revisions-no.

A1

mm / kg

date

05.12.2017

name

KAB

checked by

approved by

modified by

Jeremias
CHIMNEY SYSTEMS

description Winkel 15° starr

code 205-DWETN-AL16

drawing-no. 01-02-36-6001-205

scale

1:3

format

A4

sheet

1 of 1

