

A



B

C


D

E

F

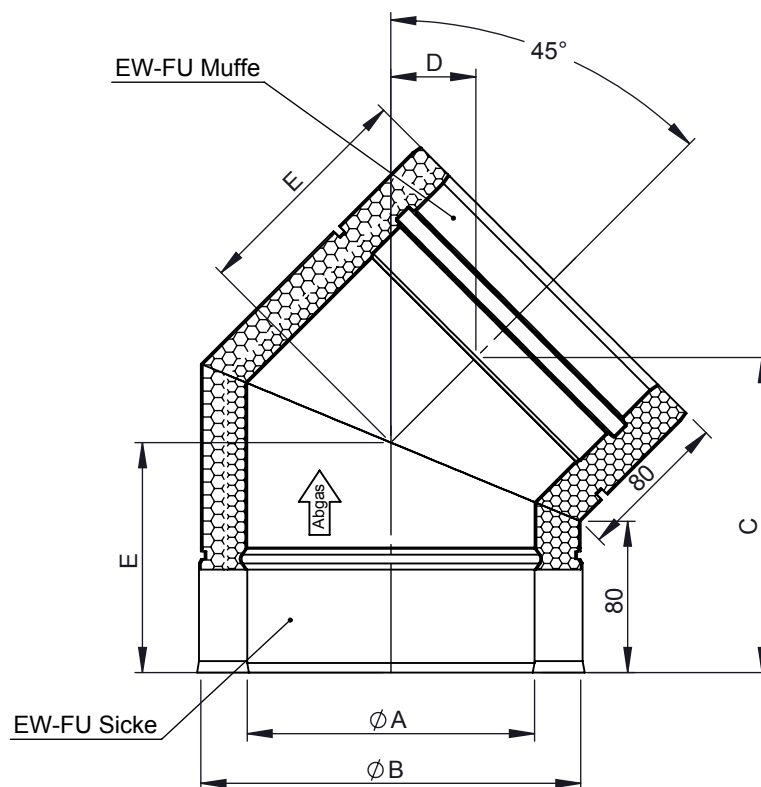

M 1:6 (Ø150)

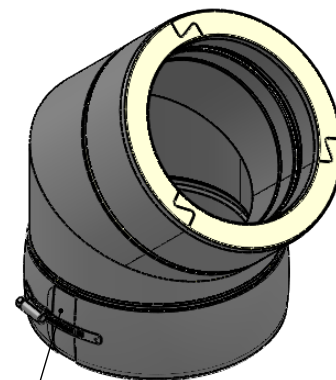

inkl. Systemklemmband

*Die innenliegenden Dichtringe müssen zusätzlich bestellt werden.
für den definierten Systemeinsatz ist die Silikon-Dichtung (Albi26) bis 200°C zu verwenden.

Ø	80	100	130	150	180	200	225	250	300	350	400	450	500	600
A	80	100	130	150	180	200	225	250	300	350	400	450	500	600
B	130	150	180	200	230	250	275	300	350	400	450	500	550	650
C	142	149	160	167	177	184	193	202	220	237	255	273	290	326
D	35	38	42	45	49	52	56	60	67	74	82	89	96	111
E	107	111	118	122	128	132	137	142	153	163	173	184	194	215
kg	1,12	1,37	1,76	2,03	2,48	2,79	3,21	3,64	4,58	5,61	6,72	7,93	9,22	12,08

notes:

DIN ISO 13920 Tolerances B

revisions-no.

A2

mm / kg

date

26.01.2018

name

KAB

checked by

approved by

modified by

Jeremias
CHIMNEY SYSTEMS

description Winkel 45°

code DWETN-AL18

drawing-no. 01-02-36-6100-000

scale

1:4

format

A4

sheet

1 of 1

