

A



B

C


D

E

F

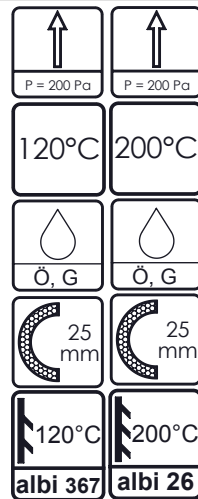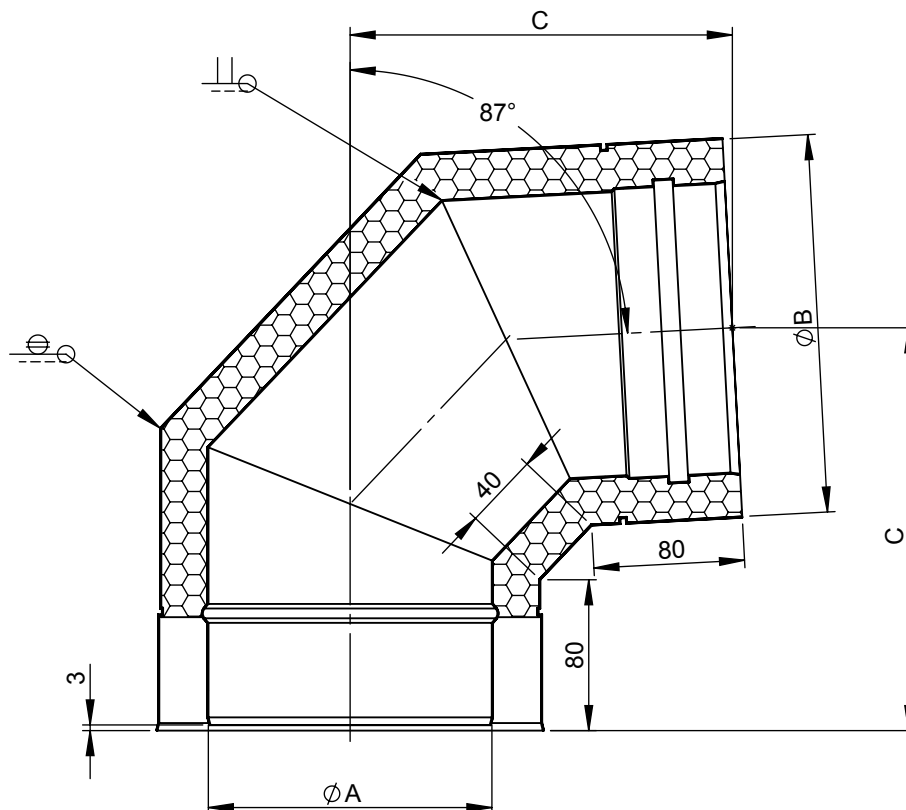

M 1:8 (Ø150)

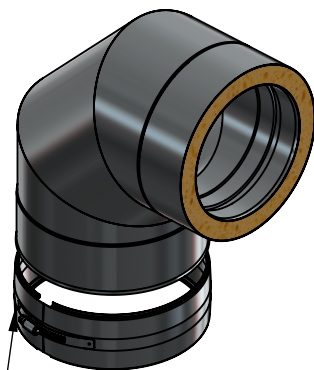

inkl. Systemklemmband

*Die innenliegenden Dichtringe müssen zusätzlich bestellt werden.

Im Standard erhalten Sie die Dichtung EPDM (albi367) bis 120°C.

Auf Wunsch können Sie die Ausstattung mit der Dichtung (albi26) bis 200°C erhalten

Ø	0080	0100	0115	0120	0130	0140	0150	0160	0180	0200	0225	0250	0300	0350	0400	0450	0500	0550	0600												
A	80	100	115	120	130	140	150	160	180	200	225	250	300	350	400	450	500	550	600												
B	130	150	165	170	180	190	200	210	230	250	275	300	350	400	450	500	550	600	650												
C	178	188	196	198	203	208	213	218	228	238	251	263	288	313	338	363	388	413	438												
t _i / t _a	0,6													0,8																	
kg	1,39	1,72	1,99	2,08	2,27	2,47	2,67	2,88	3,79	4,40	5,06	6,50	8,69	10,58	12,64	14,87	17,58	19,86	21,57												
material: inside/outside			surface: inside/outside			mm / kg				 CHIMNEY SYSTEMS®										Scale											
1.4521 / 1.4301 (444 / 304)			2B / 2R (3C / 3D)			revisions-no. A2														1:4											
						date		name												Format											
						drawn		27.06.2016												KAB		A4									
						checked				description Winkel 87° starr										Sheet											
						checked														code		DWETN-AL64		1							
						checked														drawing-no. 02-36-6200-000											
A2			28.06.2016		KAB		appr.																								
revision		date		name		All rights reserved!																									

All rights reserved!

02-36-6200-000