

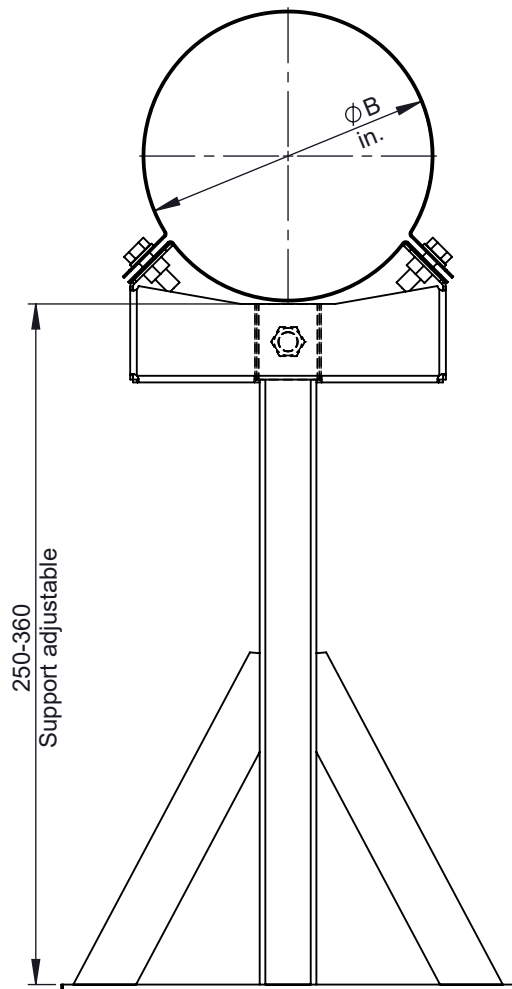


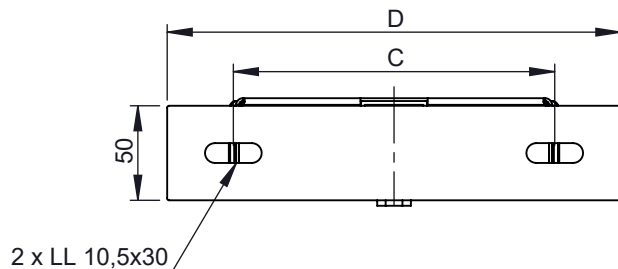

M 1:5 (Ø150)

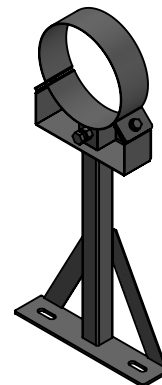

| WGR | MAT                   |
|-----|-----------------------|
| 2R2 | 1.4301(304)-2R(IIID)  |
| 2B2 | 1.4301(304)-2B(IIIC)  |
| 2J2 | 1.4301(304)-2J(GEB)FO |

| Ø  | 060  | 080  | 090  | 100  | 110  | 115  | 120 | 125  | 130  | 140  | 145 | 150  | 160  | 165  | 170 | 175 | 180 | 185  | 190 | 195  | 200 |
|----|------|------|------|------|------|------|-----|------|------|------|-----|------|------|------|-----|-----|-----|------|-----|------|-----|
| B  | 60   | 81   | 91   | 101  | 111  | 116  | 121 | 126  | 131  | 141  | 146 | 152  | 161  | 166  | 171 | 176 | 181 | 186  | 191 | 196  | 201 |
| C  | 170  |      |      |      |      |      |     |      |      |      |     |      |      |      |     |     |     |      |     |      |     |
| D  | 240  |      |      |      |      |      |     |      |      |      |     |      |      |      |     |     |     |      |     |      |     |
| kg | 1,44 | 1,52 | 1,52 | 1,53 | 1,54 | 1,55 |     | 1,56 | 1,57 | 1,76 |     | 1,77 | 1,78 | 1,79 |     | 1,8 |     | 1,87 |     | 1,88 |     |

| Ø  | 205  | 210 | 215  | 220 | 225  | 230  | 235 | 240  | 245  | 250  | 255  | 260 | 265  | 275  | 280  | 285 | 290 | 295 | 300  |
|----|------|-----|------|-----|------|------|-----|------|------|------|------|-----|------|------|------|-----|-----|-----|------|
| B  | 206  | 211 | 216  | 221 | 226  | 231  | 236 | 241  | 246  | 251  | 256  | 261 | 266  | 276  | 284  | 286 | 291 | 296 | 301  |
| C  | 170  |     |      |     |      |      |     |      |      |      |      |     |      |      |      |     |     |     |      |
| D  | 240  |     |      |     |      |      |     |      |      |      |      |     |      |      |      |     |     |     |      |
| kg | 1,89 |     | 1,92 |     | 1,93 | 1,94 |     | 1,95 | 1,97 | 1,98 | 1,99 |     | 2,07 | 2,08 | 2,09 |     | 2,1 |     | 2,11 |

notes:

DIN ISO 13920 Tolerances B

revisions-no.

A00

mm / kg

|             | date     | name |
|-------------|----------|------|
| drawn by    | 23.02.22 | MSA  |
| checked by  | 23.02.22 | SWA  |
| approved by | 23.02.22 | JWY  |
| modified by |          |      |

**Jeremias**<sup>®</sup>  
CHIMNEY SYSTEMS

description Wall bracket adjustable, wall distance 250-360mm

code WGR-ZUAC24Ø

drawing-no. 07-04-0223-000

scale

1:5


format

A4


sheet

1 of 2



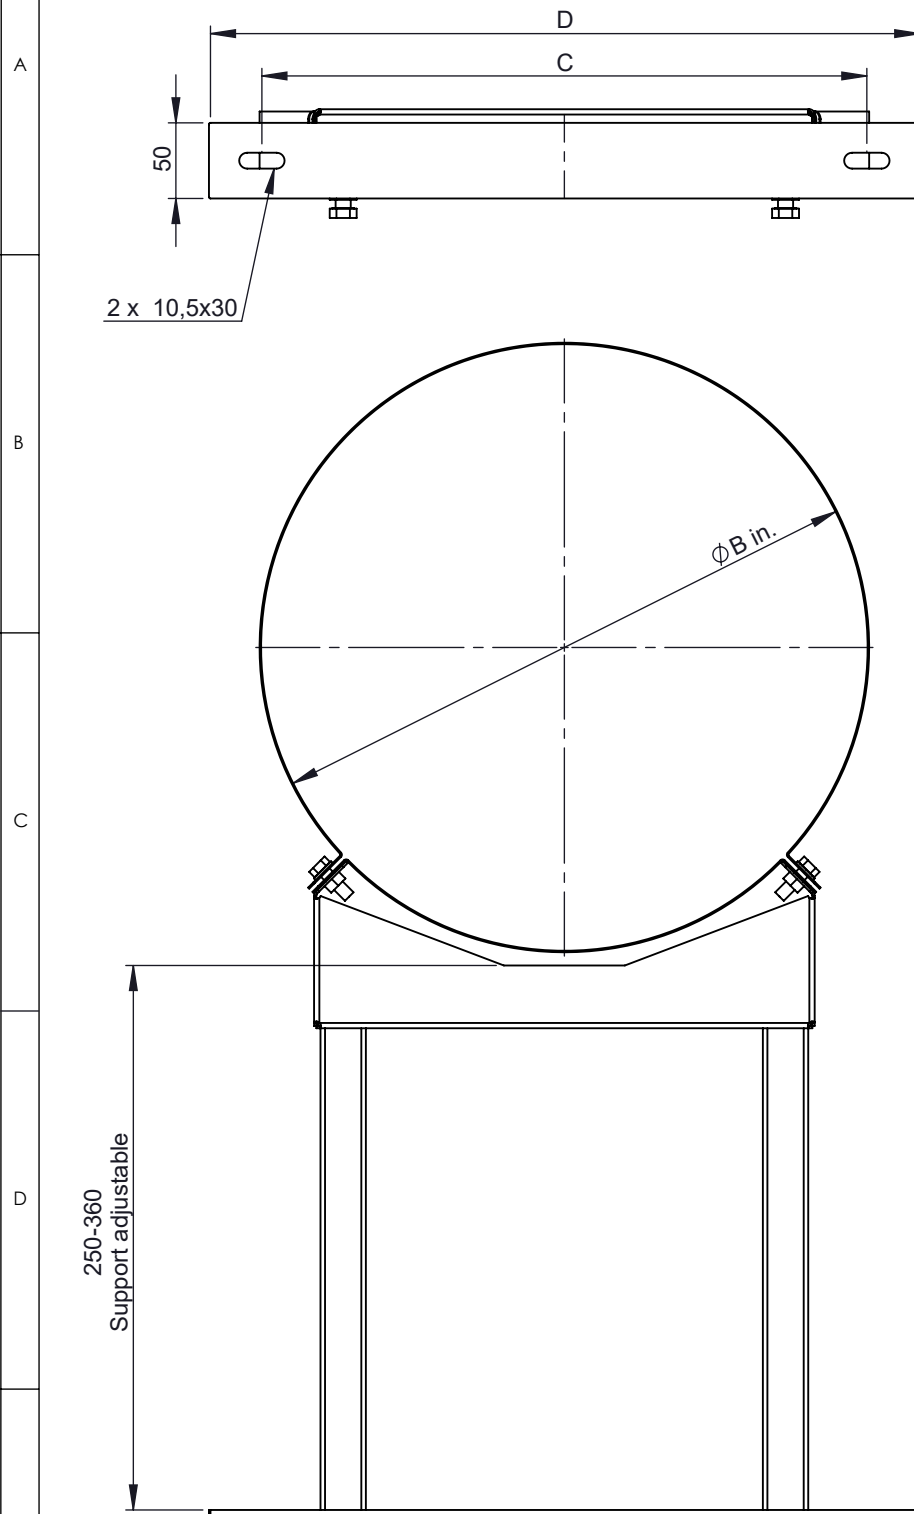

M 1:8 (Ø315)

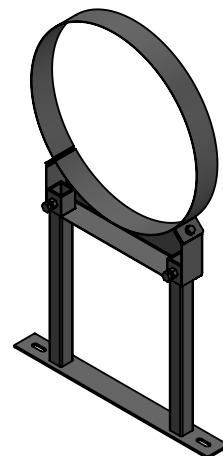

| WGR | MAT                   |
|-----|-----------------------|
| 2R2 | 1.4301(304)-2R(IIID)  |
| 2B2 | 1.4301(304)-2B(IIIC)  |
| 2J2 | 1.4301(304)-2J(GEB)FO |

| Ø  | 315  | 320  | 325  | 345  | 350  | 360  | 365  | 400  | 415 | 450  | 465  | 480  | 500  | 515  | 550  | 560  | 565  | 600  | 615  | 635  | 650 | 665 |
|----|------|------|------|------|------|------|------|------|-----|------|------|------|------|------|------|------|------|------|------|------|-----|-----|
| B  | 316  | 321  | 326  | 346  | 351  | 361  | 366  | 401  | 416 | 451  | 466  | 481  | 501  | 516  | 551  | 561  | 566  | 601  | 616  | 636  | 651 | 666 |
| C  | 370  |      |      |      |      | 400  |      |      |     |      | 480  |      |      |      |      | 545  |      |      |      |      | 700 |     |
| D  | 440  |      |      |      |      | 470  |      |      |     |      | 550  |      |      |      |      | 615  |      |      |      |      | 770 |     |
| kg | 3,11 | 3,12 | 3,13 | 3,15 | 3,16 | 3,28 | 3,33 | 3,35 | 3,7 | 3,71 | 3,73 | 3,76 | 3,77 | 4,06 | 4,08 | 4,08 | 4,12 | 4,14 | 4,17 | 4,19 | 4,9 |     |

notes:

DIN ISO 13920 Tolerances B

revisions-no.

A00

mm / kg

|             | date     | name |
|-------------|----------|------|
| drawn by    | 23.02.22 | MSA  |
| checked by  | 23.02.22 | SWA  |
| approved by | 23.02.22 | JWY  |
| modified by |          |      |

**Jeremias**  
CHIMNEY SYSTEMSdescription  
Wall bracket adjustable, wall  
distance 250-360mmcode  
**WGR-ZUAC24Ø**drawing-no.  
**07-04-0223-000**

scale

1:4

format

A4

sheet

2 of 2

