

A


B

C


D

E

F

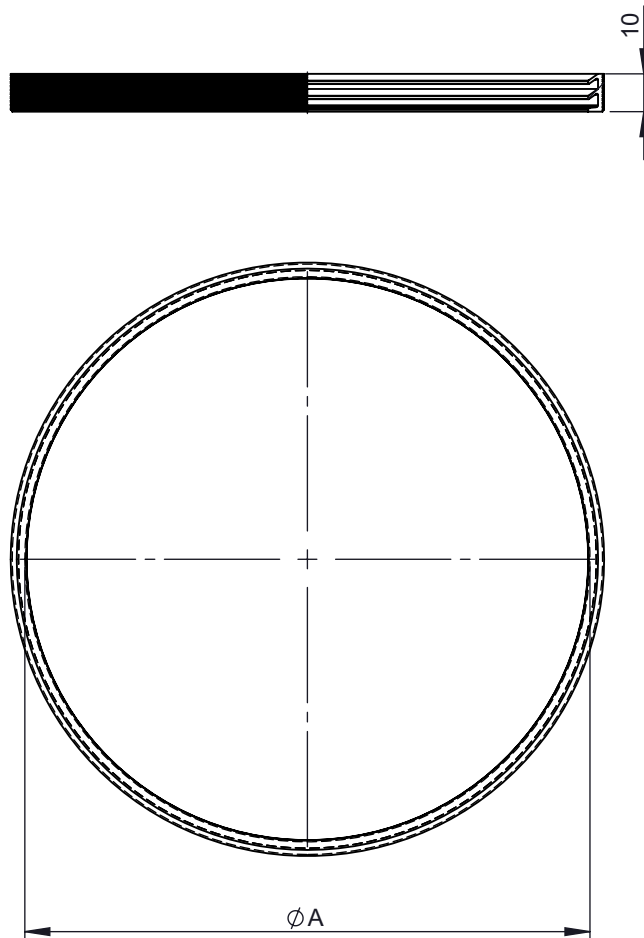

M 1:3 (Ø150)

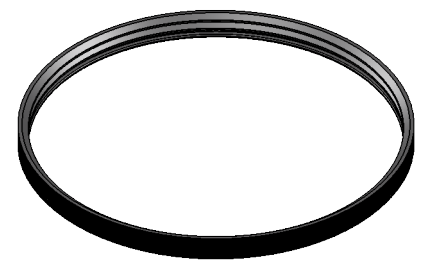

Ø	60	72	80	90	100	110	115	120	125	130	140	150	160	180	200	205	225	230	250
A	60	72	80	90	100	110	115	120	125	130	140	150	160	180	200	205	225	230	250
kg	0,01	0,01	0,01	0,02	0,02	0,02	0,02	0,02	0,02	0,02	0,02	0,02	0,03	0,03	0,03	0,03	0,04	0,04	0,04
Ø	265	270	300	350	365	400	450	500	550	600	650	700	750	800	850	900	950	1000	1100
A	265	270	300	350	365	400	450	500	550	600	650	700	750	800	850	900	950	1000	1100
kg	0,04	0,04	0,05	0,06	0,06	0,07	0,07	0,08	0,09	0,1	0,11	0,11	0,12	0,13	0,14	0,15	0,15	0,16	0,18

notes:

DIN ISO 13920 Tolerances B

revisions-no.

A1

mm / kg

date

15.01.2020

name

KSA

checked by

approved by

modified by

Jeremias[®]
CHIMNEY SYSTEMS

description **Dichtring innenliegend Silikon 200 °C**

code **ALBI26**

drawing-no. **01-01-02-9034-000**

scale

1:2

format

A4

sheet

1 of 1

