

A



B

C


D

E

F

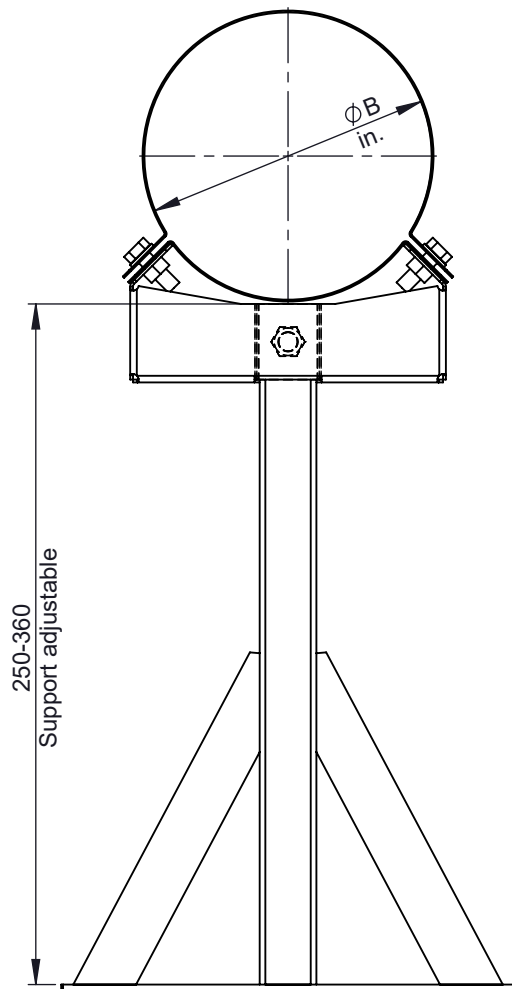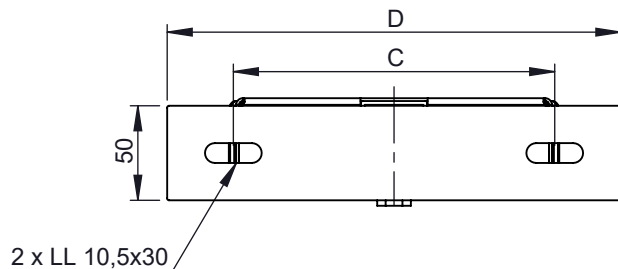

M 1:5 (Ø150)

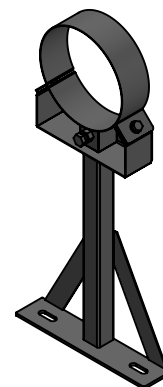

WGR	MAT
2R2	1.4301(304)-2R(IIID)
2B2	1.4301(304)-2B(IIIC)
2J2	1.4301(304)-2J(GEB)FO

Ø	060	080	090	100	110	115	120	125	130	140	145	150	160	165	170	175	180	185	190	195	200
B	60	81	91	101	111	116	121	126	131	141	146	152	161	166	171	176	181	186	191	196	201
C	170																				
D	240																				
kg	1,44	1,52	1,52	1,53	1,54	1,55		1,56	1,57	1,76		1,77	1,78	1,79		1,8		1,87		1,88	
Ø	205	210	215	220	225	230	235	240	245	250	255	260	265	275	280	285	290	295	300		
B	206	211	216	221	226	231	236	241	246	251	256	261	266	276	284	286	291	296	301		
C	170																				
D	240																				
kg	1,89		1,92		1,93	1,94		1,95	1,97	1,98	1,99		2,07	2,08	2,09		2,1		2,11		

notes:

DIN ISO 13920 Tolerances B

revisions-no.

A00

mm / kg

date

name

drawn by

23.02.22

MSA

checked by

23.02.22

SWA

approved by

23.02.22

JWY

modified by

Jeremias[®]
CHIMNEY SYSTEMS

description Wall bracket adjustable, wall distance 250-360mm

code **WGR-ZUAC24Ø**

drawing-no. **07-04-0223-000**

scale

1:5

format

A4

sheet

1 of 2



A

B

C

D


E

F

2 x 10,5x30

250-360
Support adjustable ϕB in.

M 1:8 (Ø315)

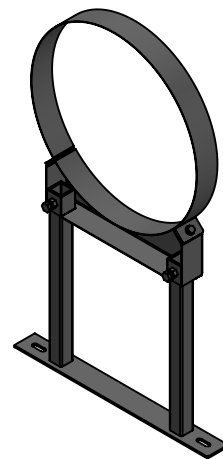

WGR	MAT
2R2	1.4301(304)-2R(IIID)
2B2	1.4301(304)-2B(IIIC)
2J2	1.4301(304)-2J(GEB)FO

Ø	315	320	325	345	350	360	365	400	415	450	465	480	500	515	550	560	565	600	615	635	650	665
B	316	321	326	346	351	361	366	401	416	451	466	481	501	516	551	561	566	601	616	636	651	666
C	370					400					480					545					700	
D	440					470					550					615					770	
kg	3,11	3,12	3,13	3,15	3,16	3,28	3,33	3,35	3,7	3,71	3,73	3,76	3,77	4,06	4,08	4,08	4,12	4,14	4,17	4,19	4,9	

notes:

DIN ISO 13920 Tolerances B

revisions-no.

A00

mm / kg

	date	name
drawn by	23.02.22	MSA
checked by	23.02.22	SWA
approved by	23.02.22	JWY
modified by		

Jeremias[®]
CHIMNEY SYSTEMSdescription
Wall bracket adjustable, wall
distance 250-360mmcode
WGR-ZUAC24Ødrawing-no.
07-04-0223-000

scale

1:4

format

A4

sheet

2 of 2

