

A

B



C

D


E

F

Possible type of female part "FU"

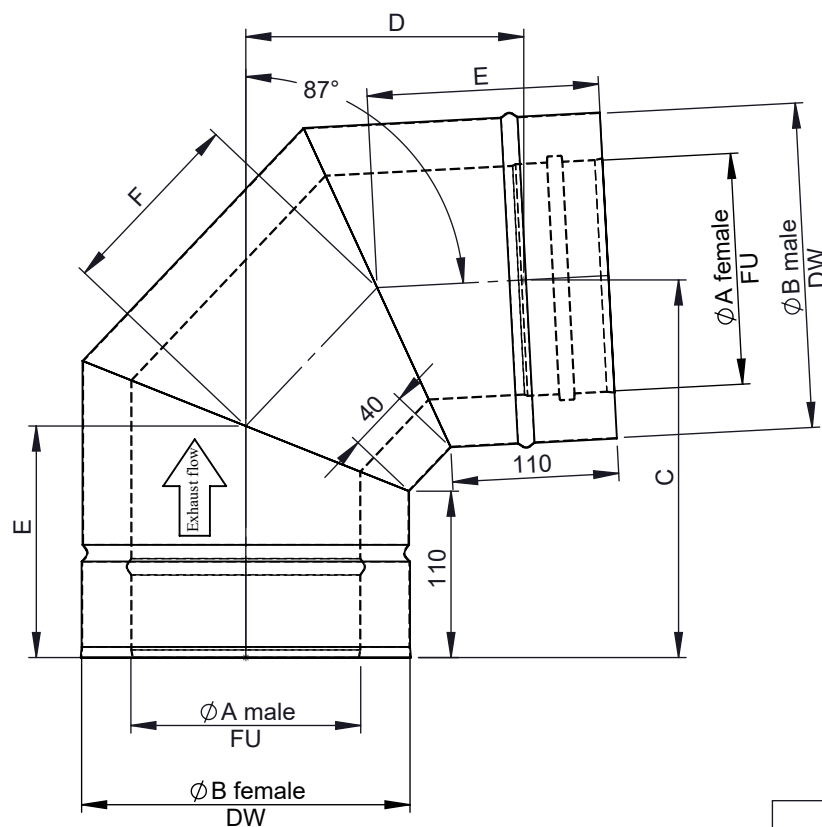

1:10 (150)



Ø	80	100	110	115	120	130	140	150	160	180	200	225	250	300	350	400	450	500	550	600	650
A	80	100	110	115	120	130	140	150	160	180	200	225	250	300	350	400	450	500	550	600	650
B	145	165	175	180	185	195	205	215	225	245	265	290	315	365	415	465	515	565	615	665	715
C	215	225	230	232	235	240	245	250	255	265	275	287	300	325	350	374	399	424	449	474	499
D	151	160	165	167	170	174	179	184	189	198	207	219	231	255	279	302	326	350	373	397	421
E	139	143	145	146	147	149	151	153	155	159	163	168	173	183	193	203	213	223	233	243	253
F	98	106	110	112	114	118	122	126	130	138	146	156	166	186	206	226	246	266	286	306	326
kg	2	2,4	2,6	2,8	2,9	3,1	3,4	3,6	3,9	4,8	4,9	6,1	6,4	8,1	10	12	14,2	16,5	19	21,7	24,6

notes:

ENCD

DIN ISO 13920 Tolerances B

revisions-no.

A

mm / kg

	date	name
drawn by	05.11.20	JMA
checked by	05.11.20	SWA
approved by	05.11.20	JWY
modified by		

Jeremias
CHIMNEY SYSTEMS

description Elbow 87°

code DW64

drawing-no. 02-20-6200-000

scale

1:5

format

A4

sheet

1 of 1

