

A


B

C

D


E

F

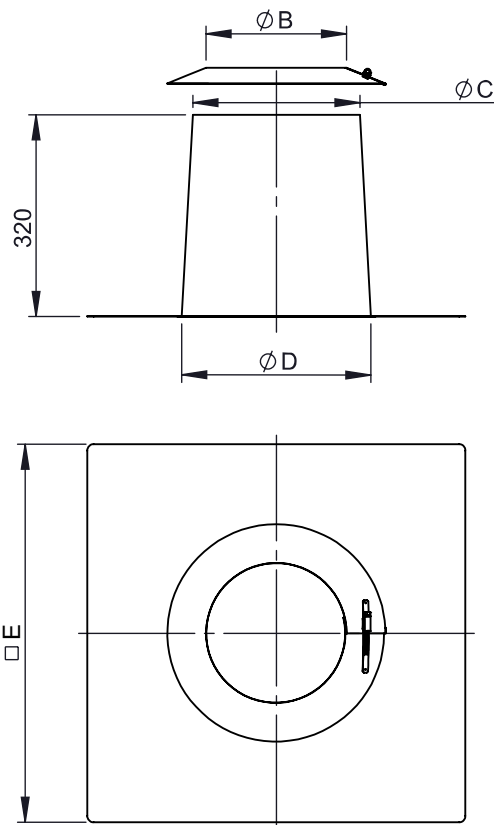

mögliche Materiallösungen	
WGR	Material
2R2-ZUAC52 Ø	1.4301(304)-2R(IIID)
2B2-ZUAC52 Ø	1.4301(304)-2B(IIIC)
2J2-ZUAC52 Ø	1.4301(304)-2J(GEB)
CU-ZUAC52 Ø	2.0090(SFCU)
VZ-ZUAC52 Ø	1.0226(DX51D)-VZ(VZ)

Ø - System-Außendurchmesser
(gilt für einwandige und doppelwandige Systeme)

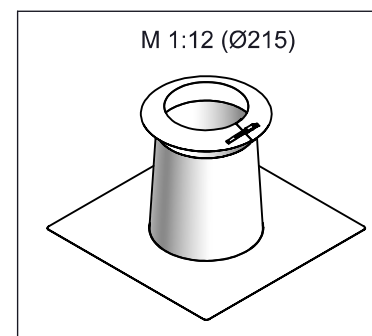

Ø	060	065	080	095	100	110	115	120	125	130	140	145	150	160	165	170	175	180	185	190	195	200
B	060	065	080	095	100	110	115	120	125	130	140	145	150	160	165	170	175	180	185	190	195	200
C	115		140		165				190				215				240				265	
D	150		175		200				225				250				275				300	
E	450		475		500				525				550				575				600	
kg	1,54	1,68	2,05	1,74	2,29	2,13	2,13	2,33	2,34	2,55	2,36	2,58	2,57	2,59	2,83	2,6	2,81	2,81	2,82	2,82	2,83	3,04
Ø	205	210	215	220	225	230	235	240	245	250	255	260	265	275	280	285	290	295	300	315	320	325
B	205	210	215	220	225	230	235	240	245	250	255	260	265	275	280	285	290	295	300	315	320	325
C	265				290				315				340				365				390	
D	300				325				350				375				400				425	
E	600				625				650				675				700				725	
kg	3,04	3,34	3,05	3,36	3,27	3,28	3,59	3,29	3,61	3,51	3,51	3,52	3,86	3,74	4,11	3,75	3,76	3,76	3,98	4,39	4	4,62
Ø	345	350	360	365	400	415	450	465	480	500	515	550	560	565	600	615	635	650	665	700	715	
B	345	350	360	365	400	415	450	465	480	500	515	550	560	565	600	615	635	650	665	700	715	
C	390		415		465		515		540	565		615		665		715		765				
D	425		450		500		550		575	600		650		700		750		800				
E	725		750		800		850		875	900		950		1000		1050		1100				
kg	4,24	4,46	4,47	4,47	4,94	5,45	5,43	5,45	6,24	6,5	5,94	7,05	7,06	7,07	6,93	6,94	6,96	7,44	7,45	8,72	7,96	

notes:

DIN ISO 13920 Tolerances B

revisions-no.

A

mm / kg

date

name

drawn by

17.02.2021

TRA

checked by

approved by

modified by

24.11.2021

USC

Jeremias
CHIMNEY SYSTEMS

description Flachdachdurchführung konisch
mit Wetterkragen

code WGR-ZUAC52 Ø

drawing-no. 01-07-04-5400-000

scale

1:12

format

A4

sheet

1 of 1

