

A


B

C


D

E

F

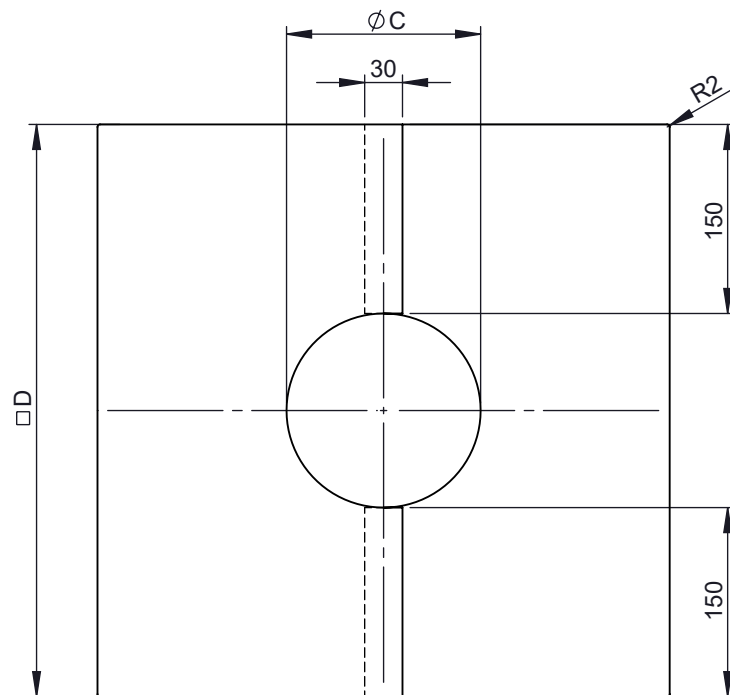

M 1:12 (Ø150)

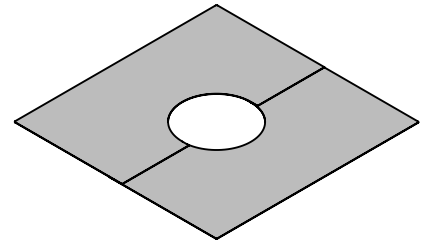

Ø	80	100	110	115	120	125	130	140	145	150	160	165	170	175	180	185	190	195	200	205		
C	83	103	113	118	123	128	133	143	148	154	163	168	173	178	183	188	193	198	203	208		
D	383	403	413	418	423	428	433	443	448	453	463	468	473	478	483	488	493	498	503	508		
kg	0,7	0,8				0,9					1,0					1,1						
Ø	210	215	220	225	230	235	240	245	250	255	260	265	275	280	285	290	295	300	315	320		
C	213	218	223	228	233	238	243	248	253	258	263	268	278	286	288	293	298	303	318	323		
D	513	518	523	528	533	538	543	548	553	558	563	568	578	583	588	593	598	603	618	623		
kg	1,1	1,2						1,3					1,4					1,5				
Ø	325	345	350	360	365	400	415	450	465	480	500	515	550	560	565	600	615	635	650	665	700	715
C	328	348	353	363	368	403	418	453	468	483	503	518	553	563	568	603	618	638	653	668	703	718
D	628	648	653	663	668	703	718	753	768	783	803	818	853	863	868	903	918	938	953	968	1003	1018
kg	1,5	1,6			1,7	1,8		1,9	2,0	2,1	2,2	2,3	2,4		2,5	2,6	2,7	2,8		3,0	3,1	

notes:

DIN ISO 13920 Tolerances B

revisions-no.

A1

mm / kg

date name

drawn by 04.02.2021 KSA

checked by

approved by

modified by 06.05.2021 KSA

Jeremias
CHIMNEY SYSTEMS

description Wand-/ Deckenblende zweiteilig 0°

code 2R2-ZUAC74

drawing-no. 01-02-76-5490-000

scale

1:6

format

A4

sheet

1 of 1

