

A
B
C
D
E
F



1

2


3

4

Ausführungsvarianten
für Muffe Innenrohr

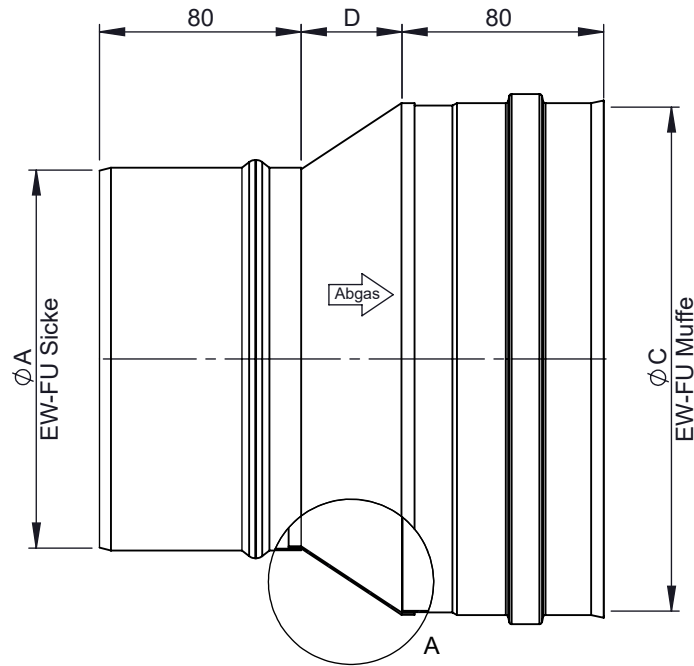


ØC - ØA ≤ 20mm 1-teilig



A (2 : 3)

ØC - ØA > 20mm 3-teilig

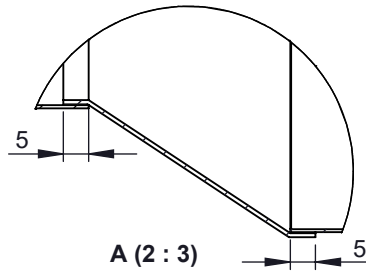

A (2 : 3)

M 1:5 (Ø150/Ø200)



Ø	60								80												90								
A	60								80												90								
C	80	90	100	110	115	130	150	200	90	100	110	115	120	125	130	140	150	160	180	200	225	250	300	100	110	115	120	130	140
D	40							100	40							100					40								
kg	0,2	0,3			0,4		0,7	0,3	0,4					0,5		0,7		0,8	0,9	1,1	0,3		0,4						

Ø	90					100										110										115			
A	90					100										110										115			
C	150	160	180	200	250	110	115	120	125	130	140	150	160	180	200	225	250	300	115	120	125	130	140	150	160	180	200	250	120
D	40			100		40					100					40					100	40							
kg	0,5			0,7	0,9	0,3	0,4			0,5	0,6	0,8	0,9	1,1	0,4			0,5			0,6			1,0	0,4				

Ø	115						120						125						130										
A	115						120						125						130										
C	130	140	150	160	180	200	125	130	140	150	160	180	200	250	130	140	150	160	180	200	250	300	140	150	160	180	200	225	250
D	40												100	40				100		40				100					
kg	0,4		0,5		0,6		0,4		0,5		0,6		1,0	0,4		0,5		0,6		1,0	1,2	0,4		0,5		0,6		0,7	1,0

notes:

DIN ISO 13920 Tolerances B

revisions-no.

A1

mm / kg

date

02.02.2021

name

KSA

checked by

approved by

modified by

description

Erweiterung

code

EWE

drawing-no.

01-01-20-3370-000

scale

1:3

format

A4

sheet

1 of 1



1

2

3

4

A

B


C

D


E

F

Ausführungsvarianten
für Muffe Innenrohr

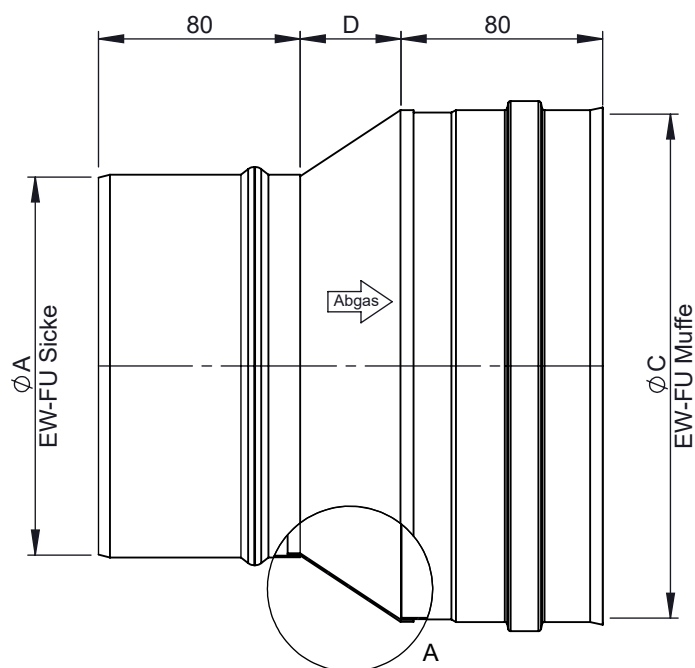


ØC - ØA ≤ 20mm 1-teilig




A (2 : 3)

ØC - ØA > 20mm 3-teilig

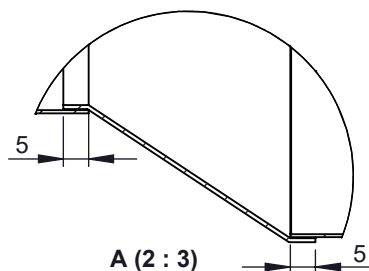

A (2 : 3)

M 1:5 (Ø150/Ø200)

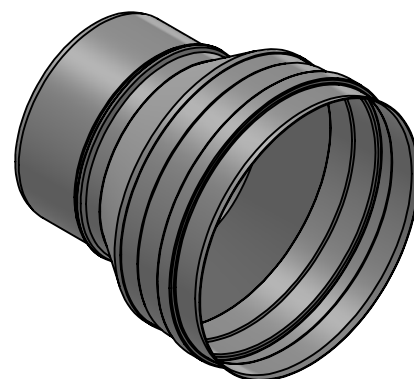

Ø	130	140					150								160					180				
A	130	140					150								160					180				
C	300	150	160	180	200	225	160	180	200	225	250	300	350	400	500	180	200	225	250	300	200	225	250	300
D	100	40								100					40				100	40			100	
kg	1,2	0,5		0,6		0,7	0,5	0,6		0,7	1,0	1,2	1,4	1,7	2,2	0,5	0,7		0,8	1,2	0,6	0,8		1,2

Ø	180	200										220	225					250							300	
A	180	200										220	225					250							300	
C	350	215	220	225	250	300	350	400	450	500	600	250	250	300	350	450	300	350	500	400	450	550	350	400		
D	100	40				100						40			100		40	100					40	100		
kg	1,4	0,7		0,8		1,3	1,5	1,7	2,0	2,2	2,9	0,8	0,9	1,0	1,5	2,0	1,0	1,5	2,2	1,7	2	2,6	1,2	1,8		

Ø	300				350					400					450			500					550		600		
A	300				350					400					450			500					550		600		
C	450	500	550	600	400	450	500	600	700	450	500	550	600	650	500	600	550	550	600	650	700	750	600	650	700	750	
D	100				40	100				40	100				40	100		40	100				40	100			
kg	2,0	2,2	2,6	2,9	1,8	2,6	2,9	3,7	4,6	2,1	2,9	3,2	3,6	4,0	2,3	3,6	3,2	2,5	3,6	3,9	4,3	4,8	2,8	3,9	4,2	4,6	

notes:

DIN ISO 13920 Tolerances B

revisions-no.

A1

mm / kg

date

name

drawn by

02.02.2021

KSA

checked by

approved by

modified by

description

Erweiterung

code

EWE

drawing-no.

01-01-20-3370-000

scale

1:3

format

A4

sheet

1 of 1

