

A


B

C


D

E

F

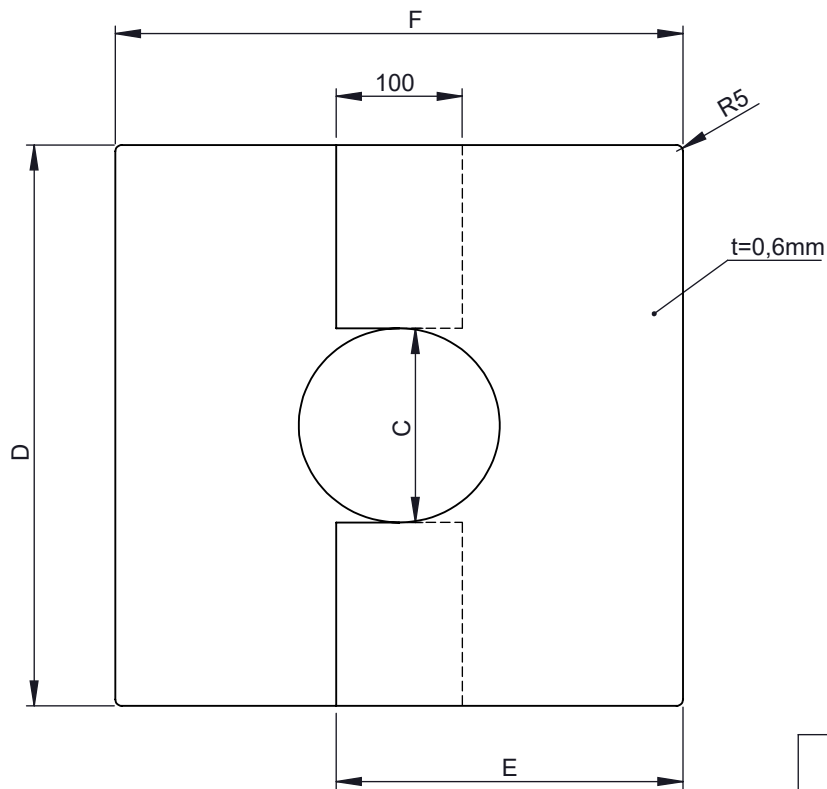

M 1:10 (Ø150)

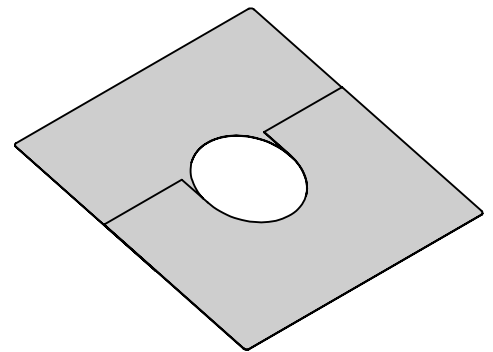

Ø	60	65	80	95	100	110	115	120	125	130	140	145	150	160	165	170	175	180	185	190	195	200	205
C	63	68	83	98	103	113	118	123	128	133	143	148	154	163	168	173	178	183	188	193	198	203	208
D	355	360	375	390	395	405	410	415	420	425	435	440	445	455	460	465	470	475	480	485	490	495	500
E	229	231	239	247	249	254	257	260	262	265	270	273	275	280	283	285	288	291	293	296	298	301	304
F	357	362	378	393	399	409	414	419	424	430	440	445	450	461	466	471	476	481	487	492	497	502	507
kg	0,72	0,74	0,78	0,83	0,84	0,87	0,89	0,9	0,92	0,94	0,97	0,98	1	1,03	1,05	1,06	1,08	1,09	1,11	1,13	1,14	1,16	1,17

Ø	210	215	220	225	230	235	240	245	250	255	260	265	275	280	285	290	295	300	315	320	325	345
C	213	218	223	228	233	238	243	248	253	258	263	268	278	286	288	293	298	303	318	323	328	348
D	505	510	515	520	525	530	535	540	545	550	555	560	570	575	580	585	590	595	610	615	620	640
E	306	309	311	314	317	319	322	324	327	329	332	335	340	342	345	348	350	353	361	363	366	376
F	512	518	523	528	533	538	543	549	554	559	564	569	580	585	590	595	600	606	621	626	631	652
kg	1,19	1,21	1,22	1,24	1,26	1,27	1,29	1,31	1,32	1,34	1,36	1,37	1,41	1,42	1,44	1,46	1,48	1,49	1,54	1,56	1,58	1,65

notes:

DIN ISO 13920 Tolerances B

revisions-no.

A2

mm / kg

date

name

drawn by

17.10.2018

TDO

checked by

approved by

modified by

16.06.2021

JLA

description Deckenblende zweiteilig 0-30°

code 2R2-ZUAC99V

drawing-no. 01-07-04-5491-000

scale

1:6


format

A4


sheet

1 of 2



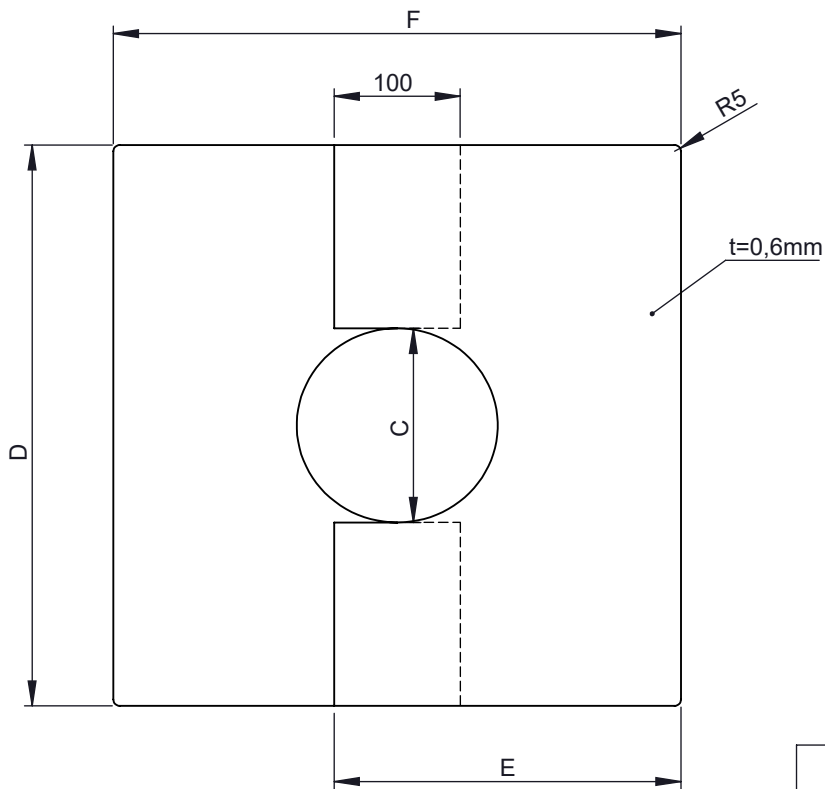

M 1:10 (Ø150)

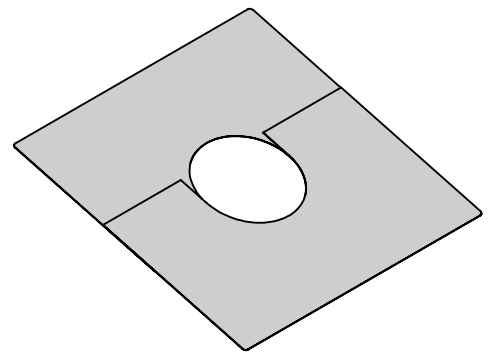

Ø	350	360	365	400	415	450	465	480	500	515	550	560	565	600	615	635	650	665	700	715	750	765
C	353	363	368	403	418	453	468	483	503	518	553	563	568	603	618	638	653	668	703	718	753	768
D	645	655	660	695	710	745	760	775	795	810	845	855	860	895	910	930	945	960	995	1010	1045	1060
E	379	384	386	405	412	430	438	446	456	464	482	487	490	508	516	526	534	542	560	568	586	593
F	657	668	673	709	725	761	776	792	813	828	864	875	880	916	932	952	968	983	1020	1035	1071	1087
kg	1,67	1,7	1,72	1,85	1,9	2,03	2,09	2,15	2,23	2,28	2,42	2,46	2,48	2,62	2,69	2,77	2,83	2,89	3,04	3,11	3,26	3,33

Ø	800	815	850	865	900	915	950	965	1000	1015	1050	1065	1100	1115	1150	1165	1200	1215	1250	1265	1300	1315
C	803	818	853	868	903	918	953	968	1003	1018	1053	1068	1103	1118	1153	1168	1203	1218	1253	1268	1303	1318
D	1095	1110	1145	1160	1195	1210	1245	1260	1295	1310	1345	1360	1395	1410	1445	1460	1495	1510	1545	1560	1595	1610
E	612	619	637	645	663	671	689	697	715	723	741	749	767	775	793	801	819	826	845	852	870	878
F	1123	1139	1175	1191	1227	1242	1279	1294	1330	1346	1382	1398	1434	1449	1486	1501	1537	1553	1589	1605	1641	1656
kg	3,48	3,55	3,71	3,78	3,94	4,02	4,18	4,26	4,43	4,5	4,68	4,75	4,93	5,01	5,19	5,27	5,45	5,54	5,72	5,81	6	6,08

notes:

DIN ISO 13920 Tolerances B

revisions-no.

A2

mm / kg

date

name

drawn by

17.10.2018

TDO

checked by

approved by

modified by

16.06.2021

JLA



description Deckenblende zweiteilig 0-30°

code 2R2-ZUAC99V

drawing-no. 01-07-04-5491-000

scale

1:6

format

A4

sheet

2 of 2

