
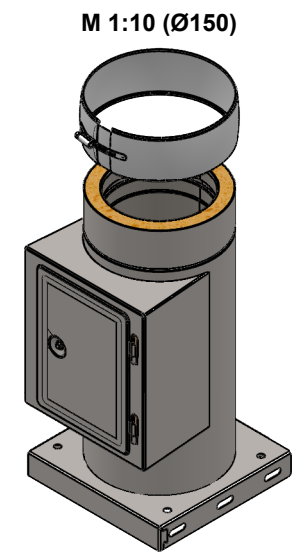
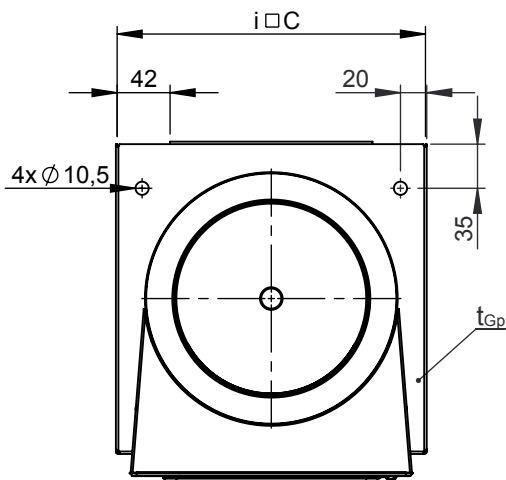
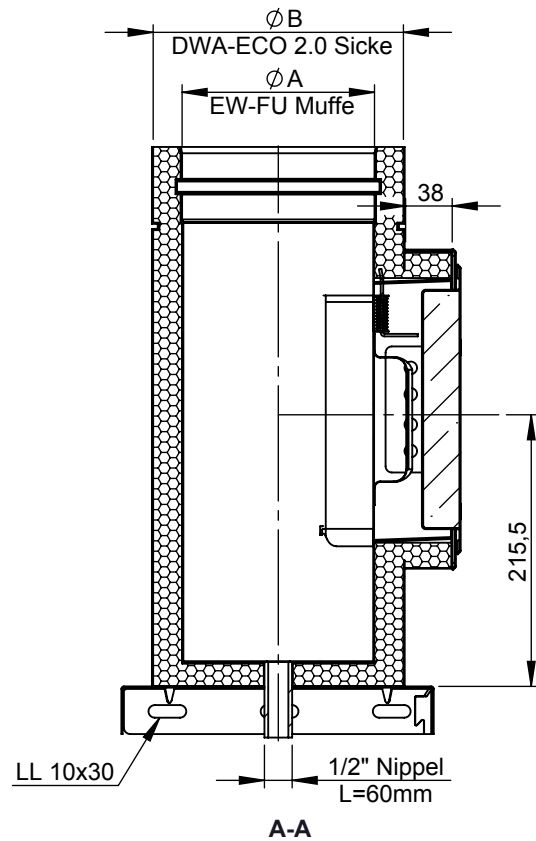


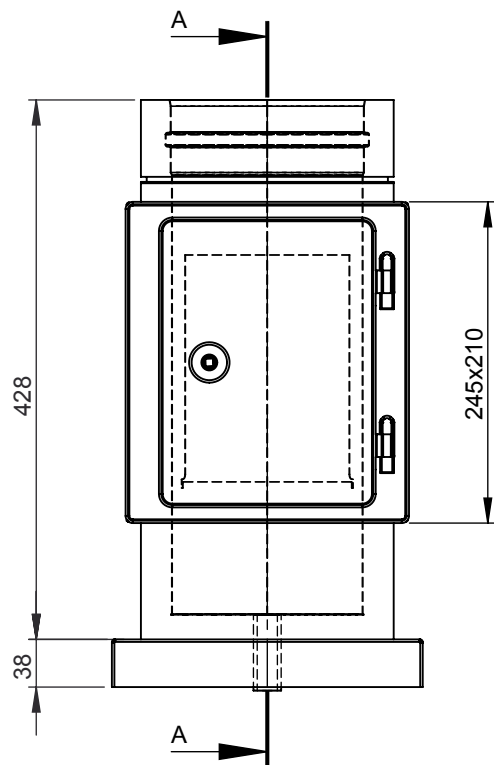

inkl. Systemklemmband

Ø	130	150	160	180	200	225	250	300	350	400	450	500	550	600			
A	130	150	160	180	200	225	250	300	350	400	450	500	550	600			
B	180	200	210	230	250	275	300	350	400	450	500	550	600	650			
C	225	245	255	275	295	320	345	395	445	495	545	595	645	695			
ti/ta	0,6 / 0,6																
tGp	1,0					1,5			2,0								
kg	7,1	7,6	7,8	8,4	8,7	9,5	10,3	11,1	13,0	14,7	16,4	18,5	21,4	24,1			
material: inside/outside 1.4404 / 1.4301 (316L / 304)		surface: inside/outside 2B / 2R (3C / 3D)		DIN ISO 13920 Tolerances B				 CHIMNEY SYSTEMS®						scale 1:6			
				revisions-no. A6		mm / kg								format A4			
notes:					date		name		description Grundplatte mit Kondensatablauf unten mit Ablauf 1/2" Nippel l=60mm und Reinigung mit Stellblech, Kasten und Tür 210x140mm, l=428mm, 200°C/N1, zur Montage auf Wandstütze						sheet 1 of 1		
				drawn by		16.02.2018		KAB							code 215-DW-ECO 383		
				checked by											drawing-no. 02-35-1123-000		
				approved by													
				modified by		13.08.2018		KAB									